

Elegance Slim


Emergency Luminaires & Exit Signs
Surface Mounted, Single Sided

Specifications


Application	Escape Sign, Anti-Panic Lighting, Escape Route lighting, Hazardous Area Lighting
Mounting	Direct mounting to wall & ceiling. Recessed mounting is available by accessory
Mode	Selectable maintained/non-maintained
Emergency Duration	Selectable 1/3 hours
Viewing Distance	23m. Single sided
Light Source	LED module, 12 mid power leds, 6500K, CRI>80
Battery	3.6 Volt High temperature battery block, Ni-Cd/ Ni-MH
Wiring	Up to 2x2,5 mm ² quick fit terminal block
Cable Entry	Four easy breakable entry holes back, rear & top parts
Power Supply	230 Volt, 50/60Hz, max 0,05A, max 5W
Protection	IP65
Temperature Range	5-40°C
Electrical Class	Class II (no earth wiring required)
Material	White polycarbonate housing




Dimensions (mm)

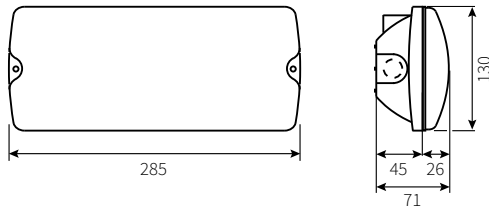

Polar Lighting Distribution Curve



Viewing Distance



Elegance Double


Emergency Exit Signs
Surface Mounted, Double Sided

Specifications

Application	Escape Sign
Mounting	Direct mounting to ceiling. Suspended, recessed & flag mounting is available by accessories
Mode	Selectable maintained/non-maintained
Emergency Duration	Selectable 1/3 hours
Viewing Distance	24m. Single & double sided
Light Source	LED module, 12 mid power leds, 6500K, CRI>80
Battery	3.6 Volt High temperature battery block, Ni-Cd/ Ni-MH
Wiring	Up to 2x2,5 mm ² quick fit terminal block
Cable Entry	Four easy breakable entry holes back, rear & top parts
Power Supply	230 Volt, 50/60Hz, max 0,05A, max 5W
Protection	IP65
Temperature Range	5-40°C
Electrical Class	Class II (no earth wiring required)
Material	White polycarbonate housing



Dimensions (mm)

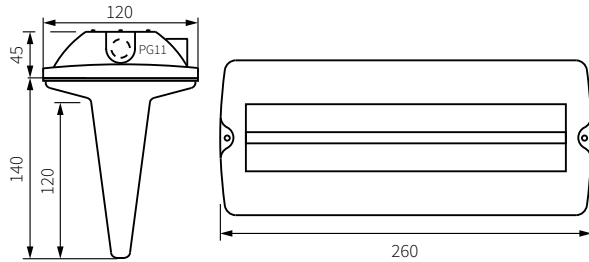

Viewing Distance

